

06/18/97

United States Postal Service Express Mail
Mailing Label No. EM609598300US

65703 U.S. PTO

08/878433



06/18/97

A/NO
FEE

June 18, 1997

BOX PATENT APPLICATIONAssistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed for filing is a patent application of Andrew L. Flaherty, 2003 Parkview Cir. East, Hoffman Estates, Illinois 60195 and Rainer F. Engelmann, 4491 Bayside Cir., Hoffman Estates, Illinois 60195, entitled "AEROSPACE HOUSING AND SHAFT ASSEMBLY WITH NONCONTACTING SEAL" including the following documents:

Specification including Claims - 15 pages
Abstract of the Disclosure
Drawings - 3 sheets

This application claims the benefit of prior filed co-pending provisional patent application Serial No. 60/020,153, filed June 20, 1996.

Please address all correspondence to:

David B. Smith, Esq.
Michael, Best & Friedrich
100 East Wisconsin Avenue
Milwaukee, WI 53202-4108

Respectfully submitted,

Kevin P. Moran
Reg. No. 37,193

File No. 65112/9484V3
cc: Docketing

65112/9484V3

AEROSPACE HOUSING AND SHAFT ASSEMBLY
WITH NONCONTACTING SEAL

REFERENCE TO RELATED APPLICATIONS

5

This is a continuing application of U.S. Serial No. 60/020,153, filed June 20, 1996.

FIELD OF THE INVENTION

10

The present invention generally relates to the field of aerospace housing and shaft assemblies, and more specifically to seals for providing a barrier between a housing and a shaft in an aerospace application.

15

BACKGROUND OF THE INVENTION

Mechanical face seals are commonly used to provide a seal between a stationary housing and a rotating shaft. Such seals include a rotating ring mounted on the shaft and a stationary ring mounted on the housing. Either the stator or the rotor is biased toward the other to provide a biased seal therebetween.

20

In a fluid pump, such as a compressor, the seal between the housing and the shaft must inhibit the loss of high pressure fluid (e.g., oil) from the housing. To accomplish this, some seals include spiral grooves on the face of either the stator or the rotor. The grooves are angled relative to the radius and circumference of the rotating shaft and, when the rotor is rotating, the grooves pressurize the low pressure fluid and "pump" the fluid between the stator and the rotor. This pumping of the low pressure fluid toward the high pressure fluid substantially prevents loss of high pressure fluid. In order to prevent contamination of the high pressure fluid, an inert buffer fluid is provided as the low pressure fluid. U.S. Patent No. 5,375,853 discloses a seal of this type.

25

30

35

In another design, grooved face seals are used in pumps to provide a seal between a high pressure gas (e.g., a combustible gas) and the ambient atmosphere. In

this situation, two seals are commonly used. A grooved inner seal pumps the high pressure gas to an intermediate chamber, and a grooved outer seal pumps from the intermediate chamber to the atmosphere. The intermediate chamber routes the high pressure gas to a flare stack where the pumped gas is burned. The amount of high pressure gas that is lost through the outer seal is thereby minimized. An example of this type of seal is disclosed in U.S. Patent No. 5,217,233.

SUMMARY OF THE INVENTION

The present invention recognizes that grooved face seals are useful in applications other than in a fluid pump. For example, it has been discovered that grooved face seals provide significant benefits in terms of reduced heat generation and longer seal life when used in aerospace applications, such as on gear boxes, starters, constant speed drives and integrated drive generators. In fact, in some situations, significant benefits can be achieved by using grooved face seals to replace existing non-grooved seals. Surprisingly, this also has been found to work in situations where the seal is exposed to atmospheric pressures substantially less than 14.7 psia, such as when the seal is being used in an aerospace application (e.g., an aircraft) at altitude. In addition, the present invention has discovered a cost effective method for forming the grooves on the seal rings, thereby making the grooved seals applicable to a larger number of applications where cost may be an issue. Furthermore, a unique and simple hydropad configuration has been developed.

In one aspect, the present invention provides an aerospace housing and shaft assembly comprising a housing, a shaft rotatably mounted within the housing, a seal assembly operatively positioned between the housing and the shaft, and low pressure air (e.g., atmospheric air) having a pressure substantially less than 14 psia and being positioned on one side of the seal assembly.

5 The seal assembly includes a first seal ring mounted on
the housing, and a second seal ring mounted on the shaft
in facing relation to the first seal ring. One of the
first seal ring and the second seal ring includes a
hydropad. Preferably, the hydropad is positioned to pump
from the inner diameter toward the outer diameter. For
example, the low pressure air can be positioned on the
inner diameter of the seal assembly, in which case the
hydropad would pump the low pressure air. In a preferred
10 embodiment, the low pressure air has a pressure less than
about 10 psia, and more preferably less than about 5
psia.

15 The present invention also provides a method of
producing a seal assembly having a seal ring. The method
comprises the steps of positioning the seal ring in
alignment with a media blaster, placing a template
between the seal ring and the media blaster, and forcing
media from the media blaster, through the openings in the
template, and into contact with the seal ring. The seal
ring can then be mounted in a seal assembly. In one
embodiment, particulate such as ceramic beads are used as
the blast media. The positioning step can include the
step of mounting the seal ring on a holder. Preferably
the holder is rotated while the media is being forced at
20 the seal ring. To obtain better results, a timer can be
used to insure that the blast time is consistent.

25 The present invention also recognizes that hydropads
do not need to be spiral in shape. More specifically,
the hydropads can include an inner edge oriented
substantially circumferentially, an outer edge oriented
substantially circumferentially and spaced radially
outward from the inner edge, a leading edge
interconnecting the inner edge with the outer edge, and
a trailing edge interconnecting the inner edge with the
outer edge. Both the leading edge and the trailing edge
are substantially straight and oblique to a radial
direction. Preferably, to simplify the design, the inner
edge and the outer edge are also both substantially
30
35

straight. In one embodiment, the leading edge is positioned at an angle relative to the radial direction passing through a mid-point of the leading edge, and the trailing edge is positioned at the same angle relative to the radial direction passing through a mid-point of the trailing edge.

A more detailed description of a specific embodiment of the present invention is illustrated and described below.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates the use of hydropad seals in various applications in a gas turbine engine.

Figure 2 is a partial cross-section of a rotating shaft positioned in a stationary housing.

Figure 3 illustrates a front view of a mating ring having hydropads.

Figure 4 is an enlarged view of a hydropad.

Figure 5 is a front view of a template used to form the hydropads on a mating ring.

Figure 6 illustrates a partial cross section of a mating ring holder and blasting assembly.

Figure 7 is an enlarged section of the mating ring holder.

25

DETAILED DESCRIPTION

Figure 1 illustrates the use of hydropad seals in an aerospace gas turbine engine 10. It has been discovered that hydropad seals can be used in a variety of positions within the engine 10, and can be used to replace standard (non-hydropad) seals. In Figure 1, the engine 10 employs use of the hydropad seals as compressor inlet seals 11, compressor/drive seals 12, interstage seals 14, turbine seals 16, and gearbox seals 18. Uses also include accessory seals such as constant speed drives, alternators, starters, generators, de-oilers, fuel pumps, hydraulic pumps, gearboxes, main shafts and fuel control seals (not shown). Hydropad seals provide

virtually leakage free operations at temperatures ranging up to about 1000 degrees fahrenheit. The hydropad seals operate with a syrface speed at the sealing interface up to 1200 ft./sec., and can be designed to handle reverse pressures. The hydropad seals can also operate in virtually any fluid, liquid or gas.

Figure 2 illustrates a cross-section of a rotating shaft 20 positioned within a stationary housing 22, and a seal assembly 24 mounted therebetween. The seal assembly 24 includes two seal rings: a mating ring 28 mounted on the shaft 20 and a seal nose 30 mounted on the housing 22. A hydropad 26 is formed on the mating ring 28. The mating ring 28 is typically a ductile material, such as hardened steel, but instead can be composed of tungsten carbide or silicon carbide, or can be steel with a ceramic coating.

Figure 3 illustrates a front view of the mating ring 28 having a plurality of hydropads 26. The dashed lines represent an inner circumference 34 and an outer circumference 36 which define the position of the seal nose 30 relative to the hydropads 26, generally called a sealing interface area 38. As illustrated in Figure 3, the hydropads 26 overlap the inner circumference 34 of the sealing interface area 38 on the mating ring 28. A sealing dam region 40 defines the region from the outer circumference 36 of the sealing interface area 38 to the outer edge of the hydropad 26.

In Figure 2, a metal bellows 32 is positioned between the housing 22 and a seal nose 30, and allows for axial movement of the seal nose 30. When the shaft 20 is not rotating, the mating ring 28 contacts the seal nose 30 at the sealing interface area 38. A working fluid 42 (e.g., oil) is present outside (i.e., on the outer diameter of) the mating ring 26. Air 44 is positioned on the inner diameter of the seal. The air can be filtered by a filter 45 as schematically shown. The air 44 is preferably at atmospheric pressure, which is substantially less than 14.7 psia (standard absolute

pressure at sea level) in the case of an aircraft flying at altitude. As used herein, the phrase "substantially less than 14.7 psia" means that the atmospheric air is what would be experienced by an aircraft flying at altitude. The seal of the present invention has been successfully tested to pressures of about 2 psia.

When the shaft 20 is rotating, the hydropads 26 force the air 44 between the mating ring 28 and the seal nose 30 to thereby cause a small gap to develop between the sealing interface area 38 and the seal nose 30. As the air 44 is pressurized, a barrier is created inhibiting working fluid 42 from passing through the sealing interface area 38. When the shaft 20 is not rotating, the sealing dam region 40 seals the working fluid 42 on the outside of outer circumference 36 of the sealing interface area 38. Because the hydropads 26 do not extend across the entire top surface of mating ring 28, the separation of the lubricating fluid region 38 from the air region 44 is accomplished.

Although the present embodiment illustrates a mating ring 28 rotating within the stationary housing 22, it is also possible for the stationary housing 22 to rotate with the mating ring 28 in a fixed position.

Figure 4 is an enlarged view of a hydropad 26. The configuration of the hydropad 26 is such that a leading edge 44 and a trailing edge 46 diverge radially outwardly and are positioned at a constant angle relative to their respective radial axes. An inner edge 48 and an outer edge 50 are substantially straight and connect edges 44 and 46. In an alternate hydropad configuration, the inner edge 48 and outer edge 50 can be curved with a center of rotation positioned toward the center of the mating ring.

The required depth of the hydropad 26 varies depending upon the application. The illustrated hydropads 26 consist of many shallow grooves at a given depth of approximately 0.0001 inches to 0.0025 inches, and at a fixed angle about the inner diameter of the

sealing face. The depth, number of grooves and angle of the paths are fixed at fixed values and are chosen to meet the given operating conditions as necessary.

5 A method of forming a hydropad on a mating ring is also described, and is most clearly illustrated by Figures 5 - 7. The method utilizes a media blasting technique to form the hydropads 26 on the mating ring 28. Figure 5 is a front view of the template 56 that is positioned over the front face of the mating ring 28 during the blasting procedure. Hydropad openings 62 are positioned in the size and orientation necessary to form the desired hydropads 26.

15 Figures 6 and 7 illustrate a mating ring holder 64 with a mating ring 28 positioned thereon. It is desirable to minimize the radial clearance between the mating ring 28 and the holder 64. To facilitate this, o-rings 66 may be used to help center the mating ring 28 onto the holder 64. The template 56 is positioned over the face of the mating ring 28, and a clamping plate 68 and fastener 70 are used to secure the template 56 and mating ring 28 to the holder 64. The hydropad openings 62 on the template 56 are utilized to define the areas for the formation of the hydropads 26.

25 The mating ring holder 64 is positioned adjacent to a nozzle 74 of a media blaster 72 that is aligned toward the openings 62 in template 56. The mating ring holder 64 positions the mating ring 28 and the template 56 a fixed and known distance from the nozzle 74. The vertical and horizontal positioning of the gun assembly 72 is preset prior to the starting of blasting. A media stream 80 projecting a blast from the nozzle 74 is directed such that the media stream 80 impacts midway between the inner edge 48 and outer edge 50 of the hydropads 26.

35 The media stream 80 can be composed of a variety of abrasive or peening particulate, such as angular or spherical ceramic or glass. It has been found that the use of ceramic beads is particularly advantageous since

5 a more uniform result is achieved. Alternatively, the media can comprise a water slurry or air slurry or any other suitable material that can be blasted at the seal ring to cause formation of the hydropads, whether by material removal or material compression.

10 The axial positioning of the nozzle 74 is preset prior to the starting of the blasting operation. The blast pressure of the media stream 80 is also preset prior to starting of the blasting operation. Also, the mating ring 28 begins rotation before the blasting operation is started. The media blaster 72 is turned on simultaneously with a timer (not shown) which is used to indicate when the media blaster 72 is to be turned off. This method provides the greatest number of uniform mating ring hydropad depths.

15 The media blaster 72 can be rotated to direct the media stream 80 at an end of the template cutout holes 62 that form the hydropads 26. More specifically, once the vertical, horizontal and axial locations are fixed, the nozzle 74 can be rotated such that the media stream 80 is directed at the outer edge of the openings 62. The nozzle 74 can then be rotated to direct the media stream 80 at the inner edge of the openings 62. It is contemplated that the gun assembly 72 can be set to rotate in many directions, as necessary for the particular application.

20 When the blasting operation is complete, the template 56 is unclamped from clamping plate 68, and the mating ring 28 is removed. The clamping or staging surface of the fixture is then cleaned of media 80 prior to the installation of the next mating ring 28.

25 In order to obtain the correct depth of the hydropad 26, a polishing or lapping operation after blasting may be required. The actual depth of the hydropad 26 is better controlled by either changing the blasting time, the pressure or the distance of the gun assembly 72 from the mating ring 28.

The foregoing description of the present invention has been presented for purposes of illustration and description. Furthermore, the description is not intended to limit the invention to the form disclosed herein. Consequently, variations and modifications commensurate with the above teachings, and the skill or knowledge of the relevant art, are within the scope of the present invention. The embodiments described herein are further intended to explain best modes known for practicing the invention and to enable others skilled in the art to utilize the invention in such, or other, embodiments and with various modifications required by the particular applications or uses of the present invention. It is intended that the appended claims be construed to include alternative embodiments to the extent permitted by the prior art.

20

What is claimed is:

1. An aerospace housing and shaft assembly comprising:

a housing;

5 a shaft rotatably mounted within said housing;

a seal assembly operatively positioned between said housing and said shaft, and having an inner diameter and an outer diameter, said seal assembly including:

a first seal ring mounted on said housing;

10 and

a second seal ring mounted on said shaft in facing relation to said first seal ring, wherein one of said first seal ring and said second seal ring includes a surface defining a hydropad, said
15 hydropad facing the other of said first seal ring and said second seal ring and being positioned such that it is exposed to ambient low pressure air having a pressure substantially less than 14 psia .

20 2. An aerospace housing and shaft assembly as claimed in claim 1, wherein said hydropad is positioned to pump said low pressure air from the inner diameter of the seal assembly toward the outer diameter of the seal assembly.

25 3. An aerospace housing and shaft assembly as claimed in claim 2, wherein said low pressure air acts on the inner diameter of said seal assembly.

30 4. An aerospace housing and shaft assembly as claimed in claim 3, wherein the outer diameter of said seal assembly is exposed to lubricating fluid.

35 5. An aerospace housing and shaft assembly as claimed in claim 1, wherein said low pressure air is atmospheric air.

5

10

15

9. An aerospace housing and shaft assembly as claimed in claim 8, wherein said first seal ring comprises a carbon material.

10. A seal assembly adapted for use in an aerospace housing and shaft assembly having a housing and a shaft rotatably mounted within said housing, said seal assembly having an inner diameter and an outer diameter and comprising:

5 a first seal ring mounted on said housing; and
a second seal ring mounted on said shaft in facing relation to said first seal ring, wherein one of said first seal ring and said second seal ring includes
10 a surface defining a hydropad, said hydropad facing the other of said first seal ring and said second seal ring and being positioned such that it is exposed to ambient low pressure air having a pressure substantially less than 14 psia .

15 11. A seal assembly as claimed in claim 10, wherein said wherein said hydropad is positioned to pump said low pressure air from the inner diameter of the seal assembly toward the outer diameter of the seal assembly.

20 12. A seal assembly as claimed in claim 11, wherein said low pressure air acts on the inner diameter of said seal assembly.

25 13. A seal assembly as claimed in claim 10, wherein said low pressure air is atmospheric air.

30 14. A seal assembly as claimed in claim 10, wherein said low pressure air has a pressure less than about 10 psia.

35 15. A seal assembly as claimed in claim 10, wherein said low pressure air has a pressure less than about 5 psia.

16. A seal assembly as claimed in claim 10, wherein said second seal ring comprises a ductile metallic material.

17. A seal assembly as claimed in claim 16, wherein said first seal ring comprises a carbon material.

2025 RELEASE UNDER E.O. 14176

18 . A method of producing a seal assembly having a seal ring, comprising the steps of:

positioning the seal ring in alignment with a media blaster;

5 forcing media from the media blaster, toward the seal ring, and into contact with selected locations on the seal ring to thereby form hydropads at the selected locations with the seal ring; and

mounting the seal ring in the seal assembly.

10

19. A method as claimed in claim 18, further comprising the step of placing a template between the seal ring and the media blaster, wherein the template includes openings, and wherein said forcing step includes
15 forcing media from the media blaster and through the openings in the template

15

20 . A method as claimed in claim 18, wherein said forcing step comprises the step of forcing particulate
20 from the blaster and toward the seal ring.

20

21. A method as claimed in claim 18, wherein said positioning step comprises the step of mounting the seal ring on a holder.

25

22. A method as claimed in claim 20, further comprising the step of rotating the holder.

23. A method as claimed in claim 18, further
30 comprising the step of starting a timer.

30

24. A method as claimed in claim 22, further comprising the step of stopping the media blaster after a predetermined time from said starting step.

35

2025 RELEASE UNDER E.O. 14176

25. A seal assembly comprising:

a first seal ring of a generally annular shape and defining radial and circumferential directions; and

5 a second seal ring positioned in facing relation to said first seal ring, wherein one of said first seal ring and said second seal ring includes a plurality of hydropads, said hydropads each including:

an inner edge oriented substantially circumferentially;

10 an outer edge oriented substantially circumferentially and spaced radially outward from said inner edge;

15 a leading edge interconnecting said inner edge with said outer edge, said leading edge being substantially straight and oblique to the radial direction; and

20 a trailing edge interconnecting said inner edge with said outer edge, said trailing edge being substantially straight and oblique to the radial direction.

26. A seal assembly as claimed in claim 25, wherein said inner edge and said outer edge are both substantially straight.

25

27. A seal assembly as claimed in claim 25, wherein said leading edge is positioned at an angle relative to a radial axis passing through a mid-point of said leading edge, and wherein said trailing edge is
30 positioned at the same angle relative to a radial axis passing through a corresponding mid-point of said trailing edge.

ABSTRACT

An aerospace housing and shaft assembly comprising a housing, a shaft rotatably mounted within the housing, a seal assembly operatively positioned between the housing and the shaft, and low pressure air (e.g., atmospheric air) having a pressure substantially less than 14 psia and being positioned on one side of the seal assembly. The seal assembly includes a first seal ring mounted on the housing, and a second seal ring mounted on the shaft in facing relation to the first seal ring. One of the first seal ring and the second seal ring includes a hydropad. The hydropad is positioned to pump low pressure air from the inner diameter toward the outer diameter. The hydropads can include an inner edge oriented substantially circumferentially, an outer edge oriented substantially circumferentially and spaced radially outward from the inner edge, a leading edge interconnecting the inner edge with the outer edge, and a trailing edge interconnecting the inner edge with the outer edge.

r:\xf\client\65112\9484\kpm0176.w52|06/18/97




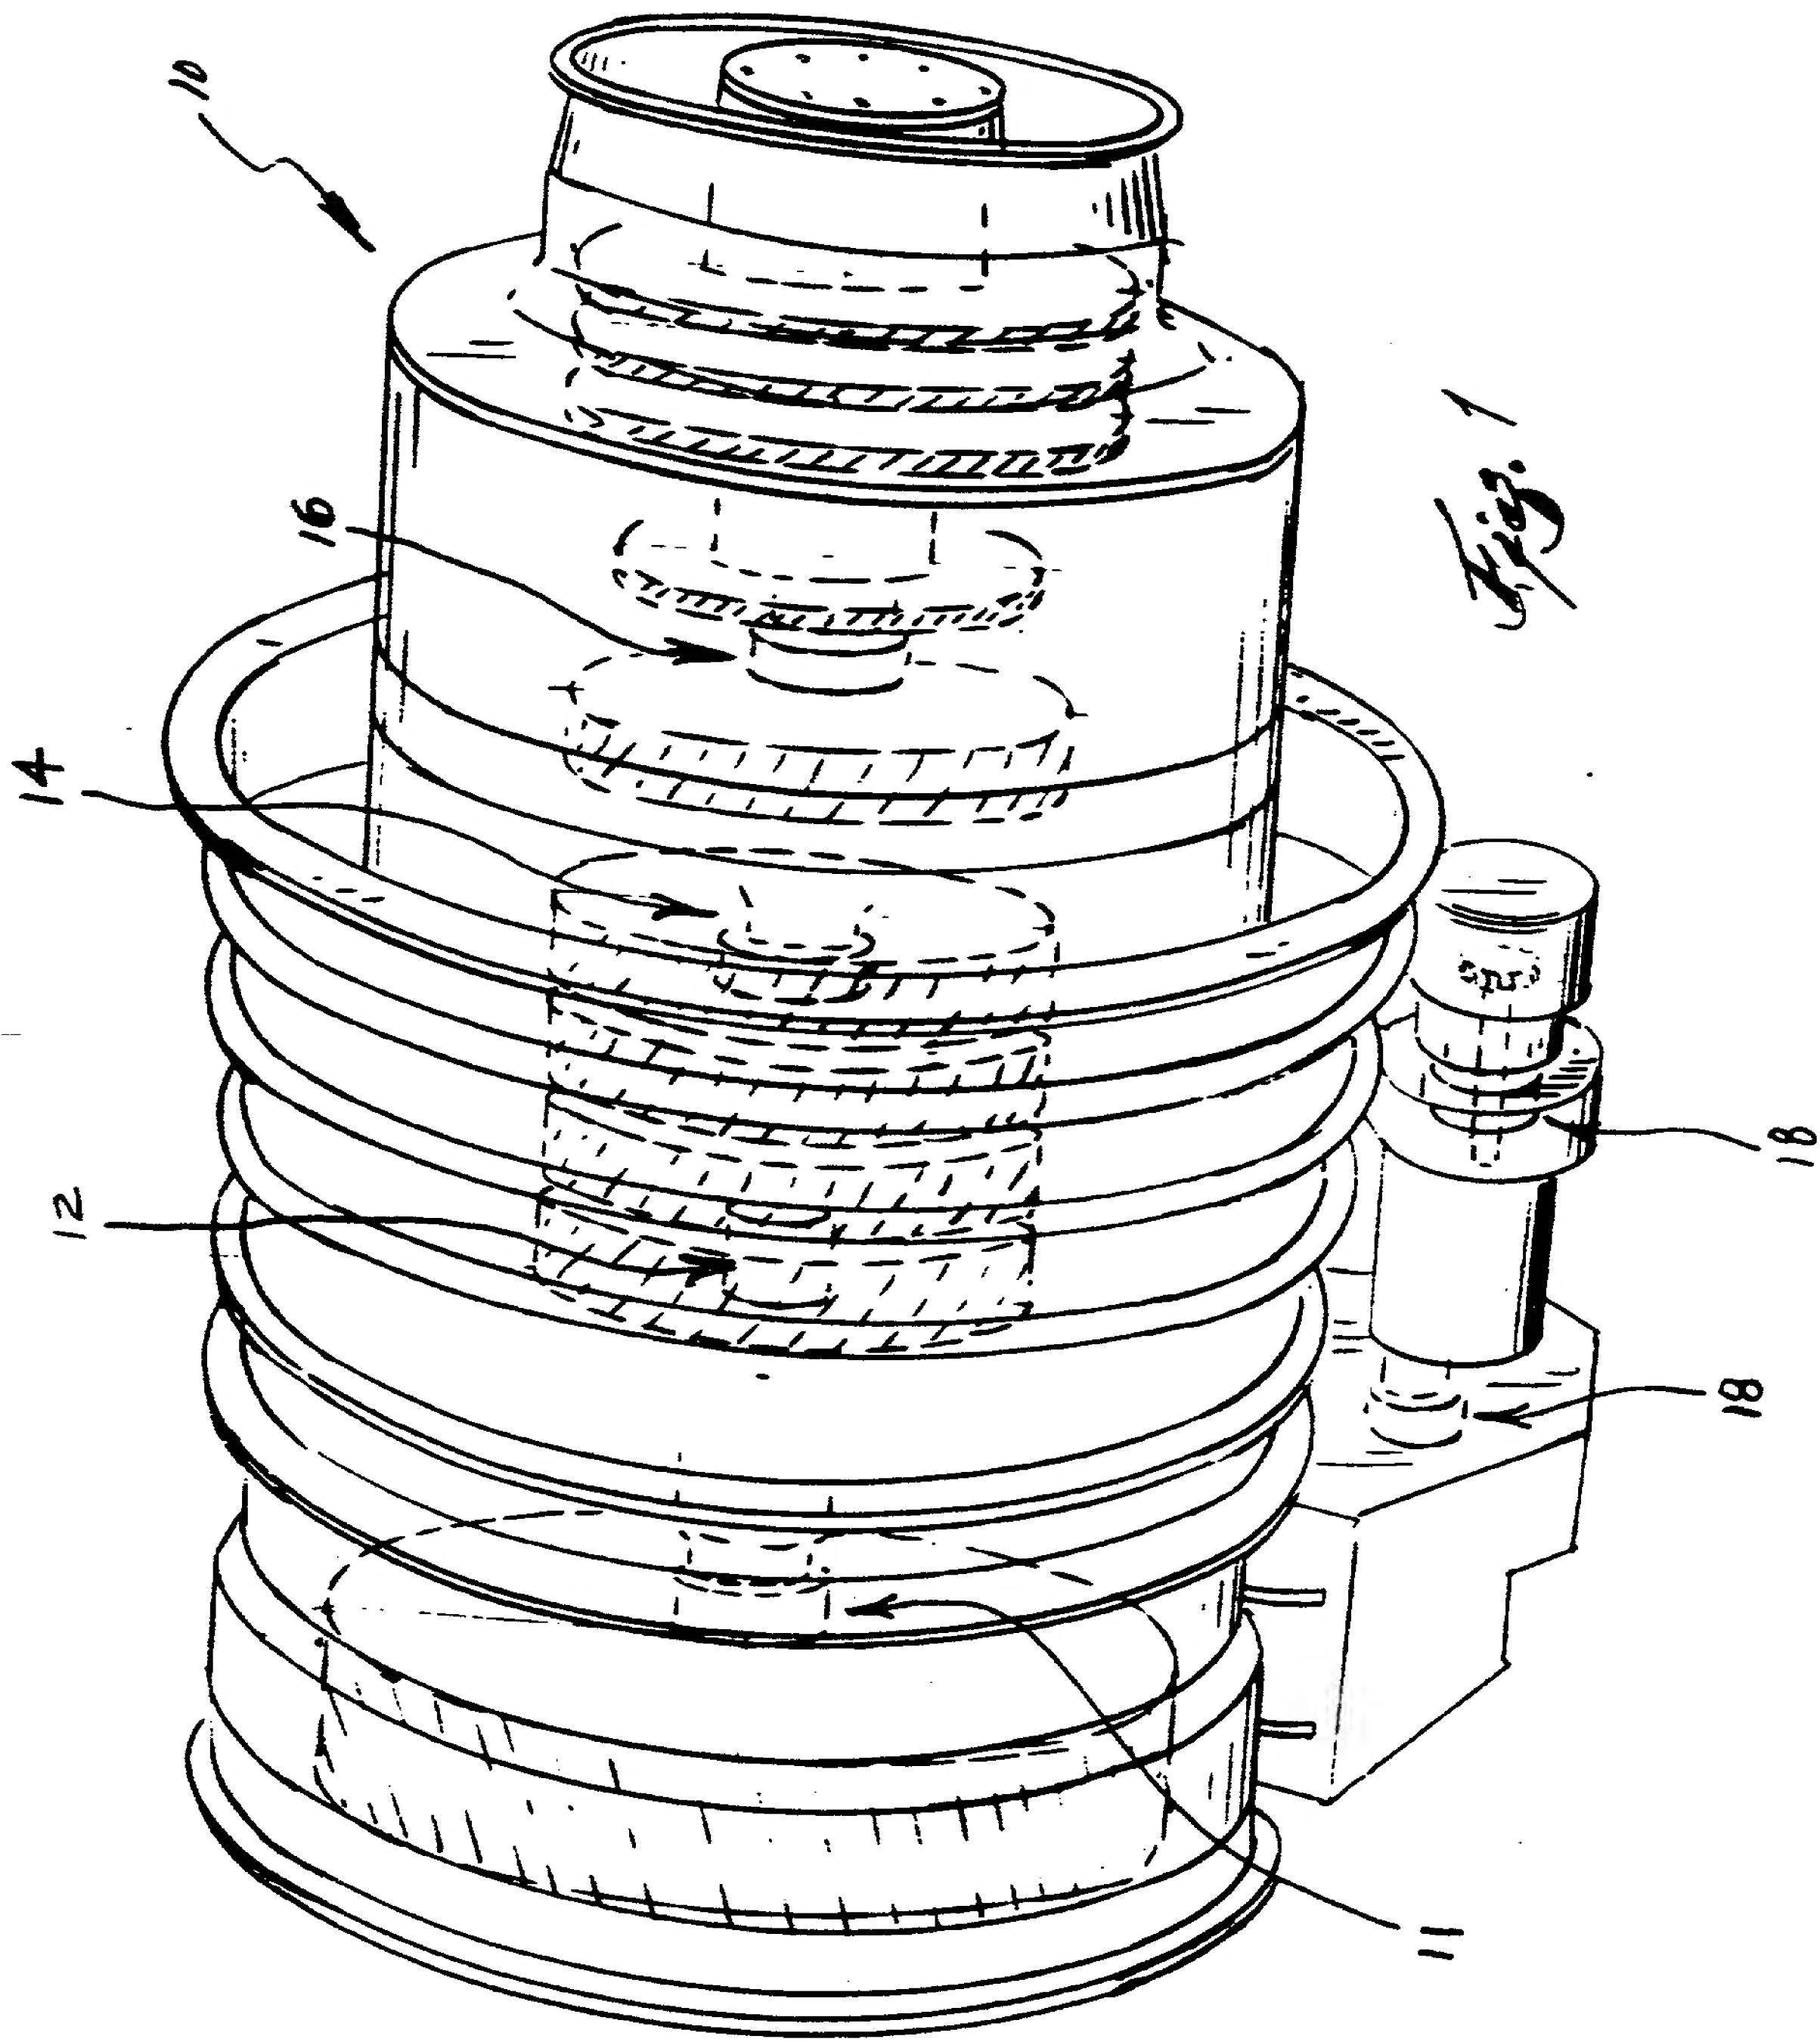


Fig. 1

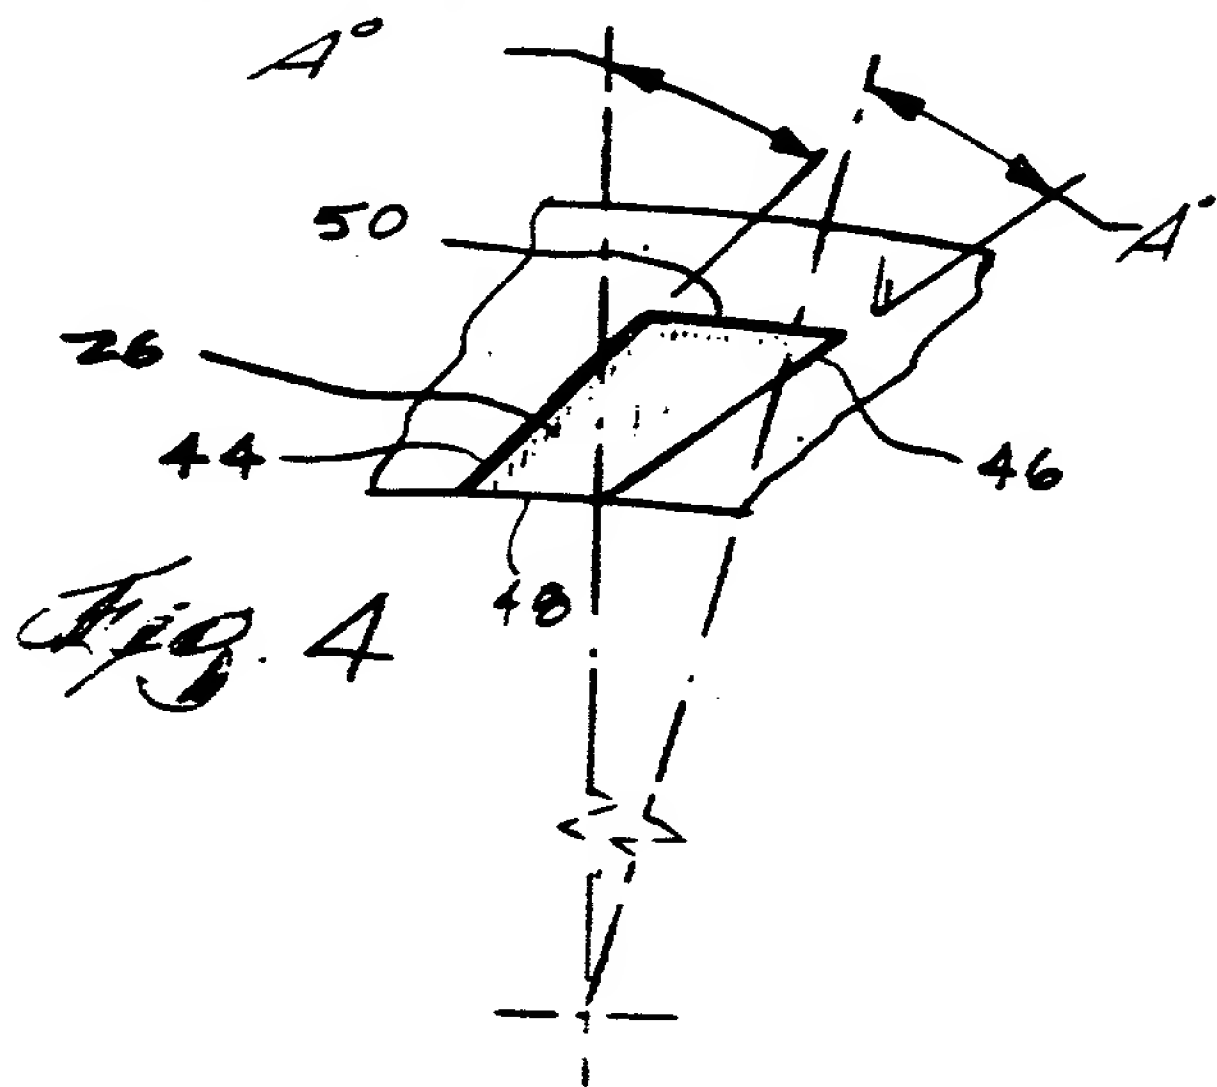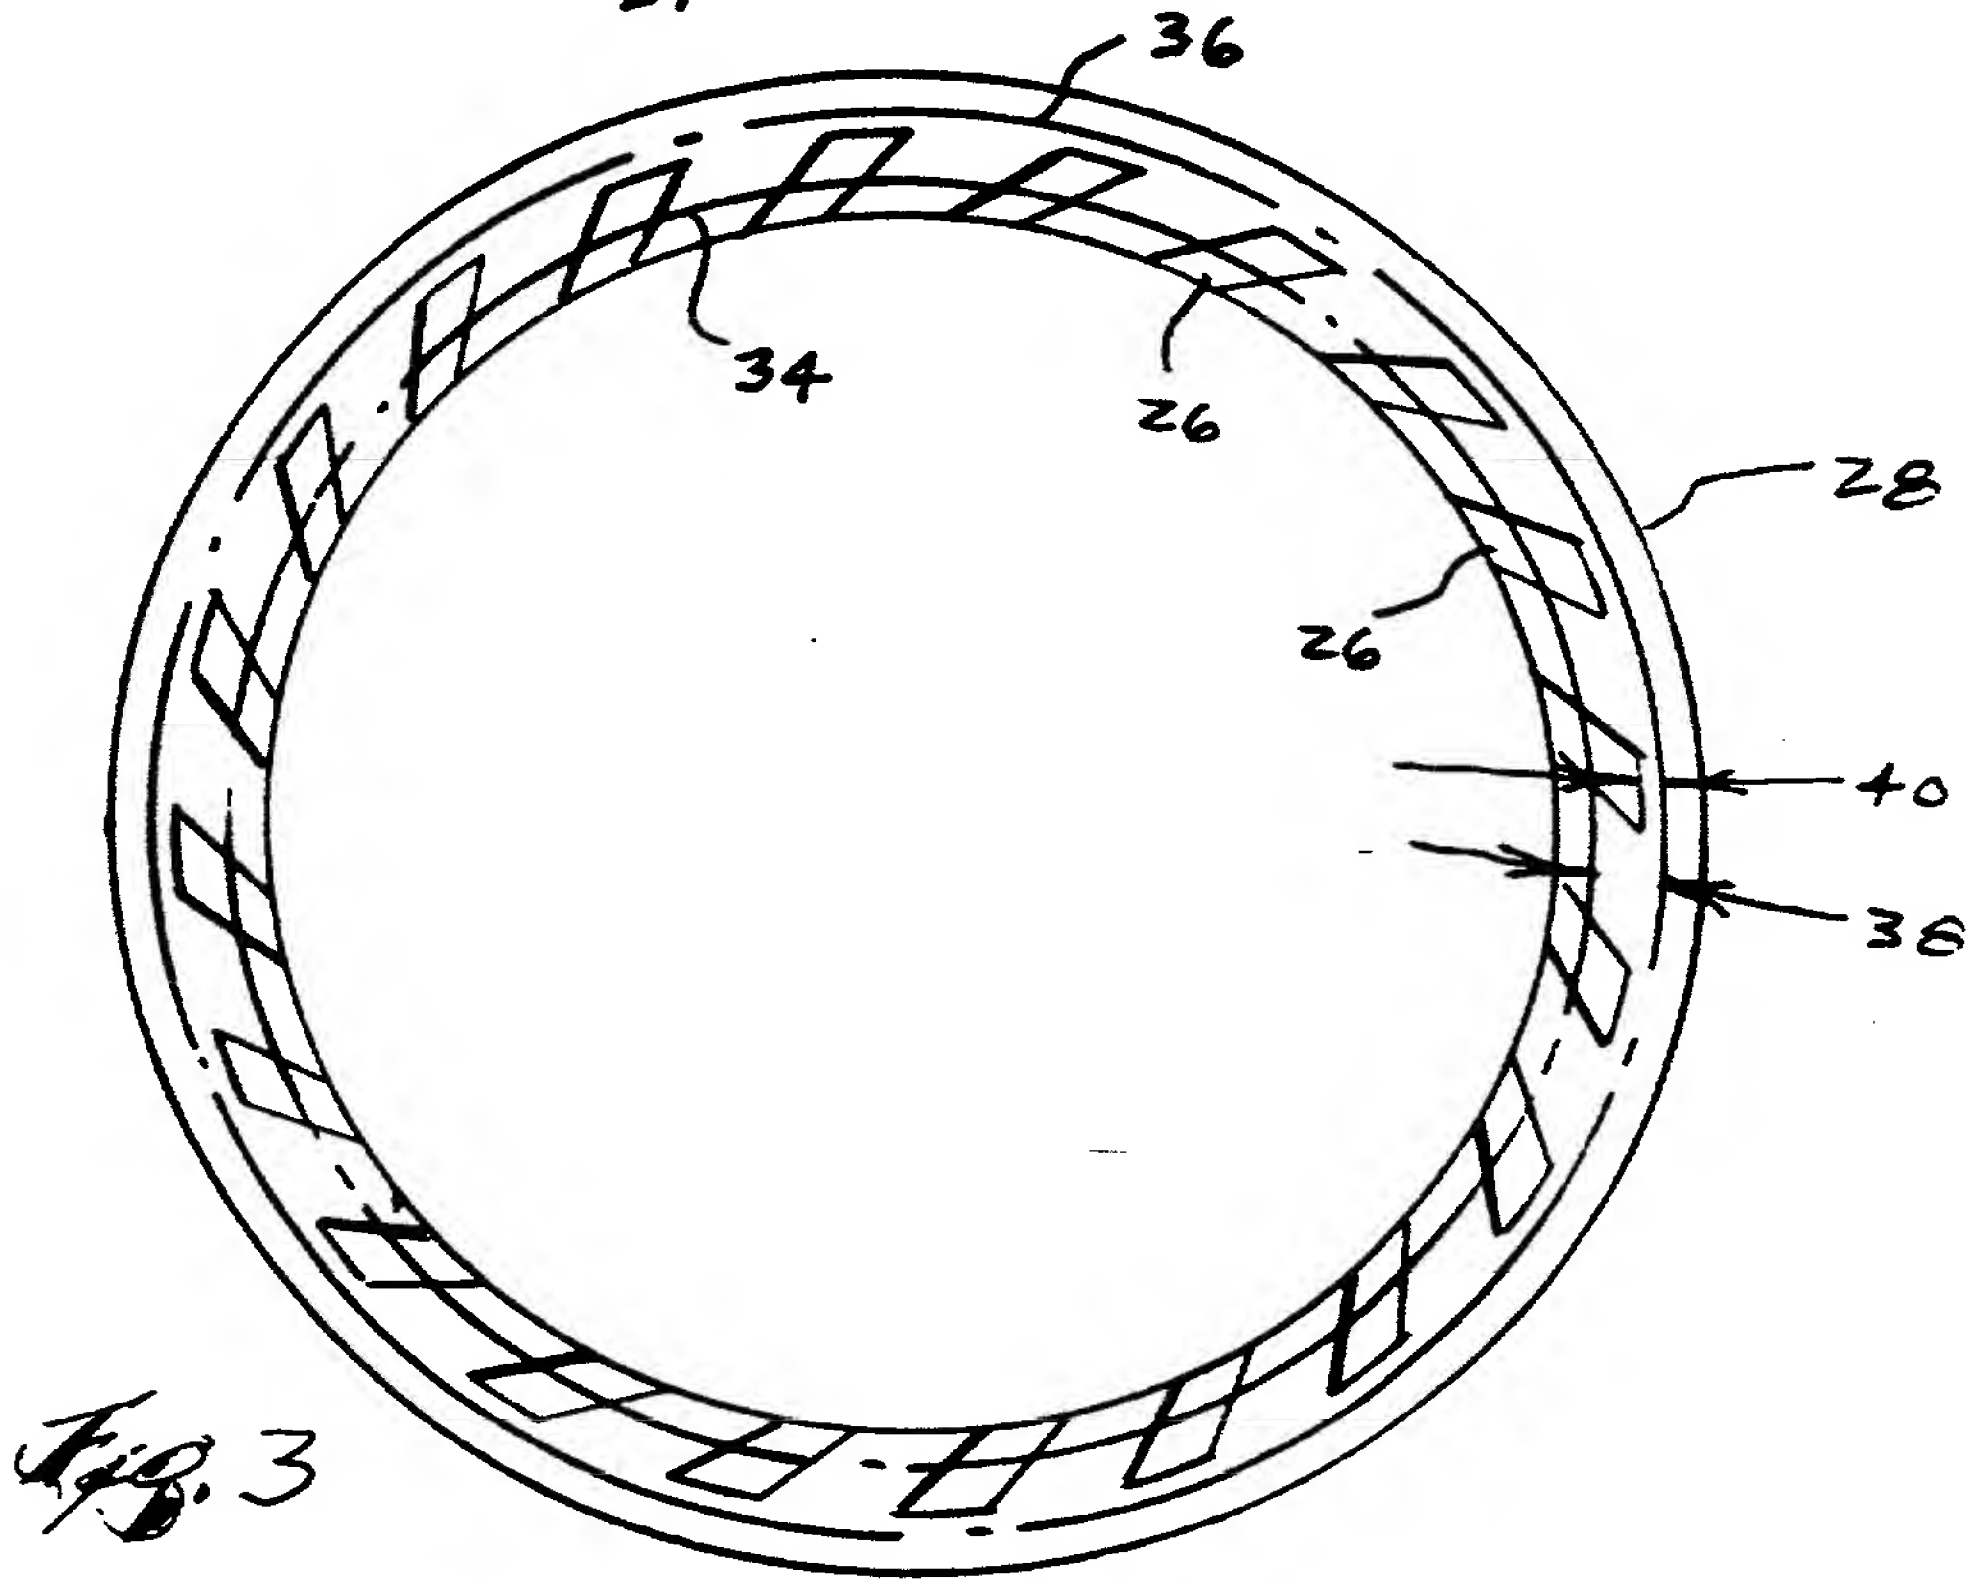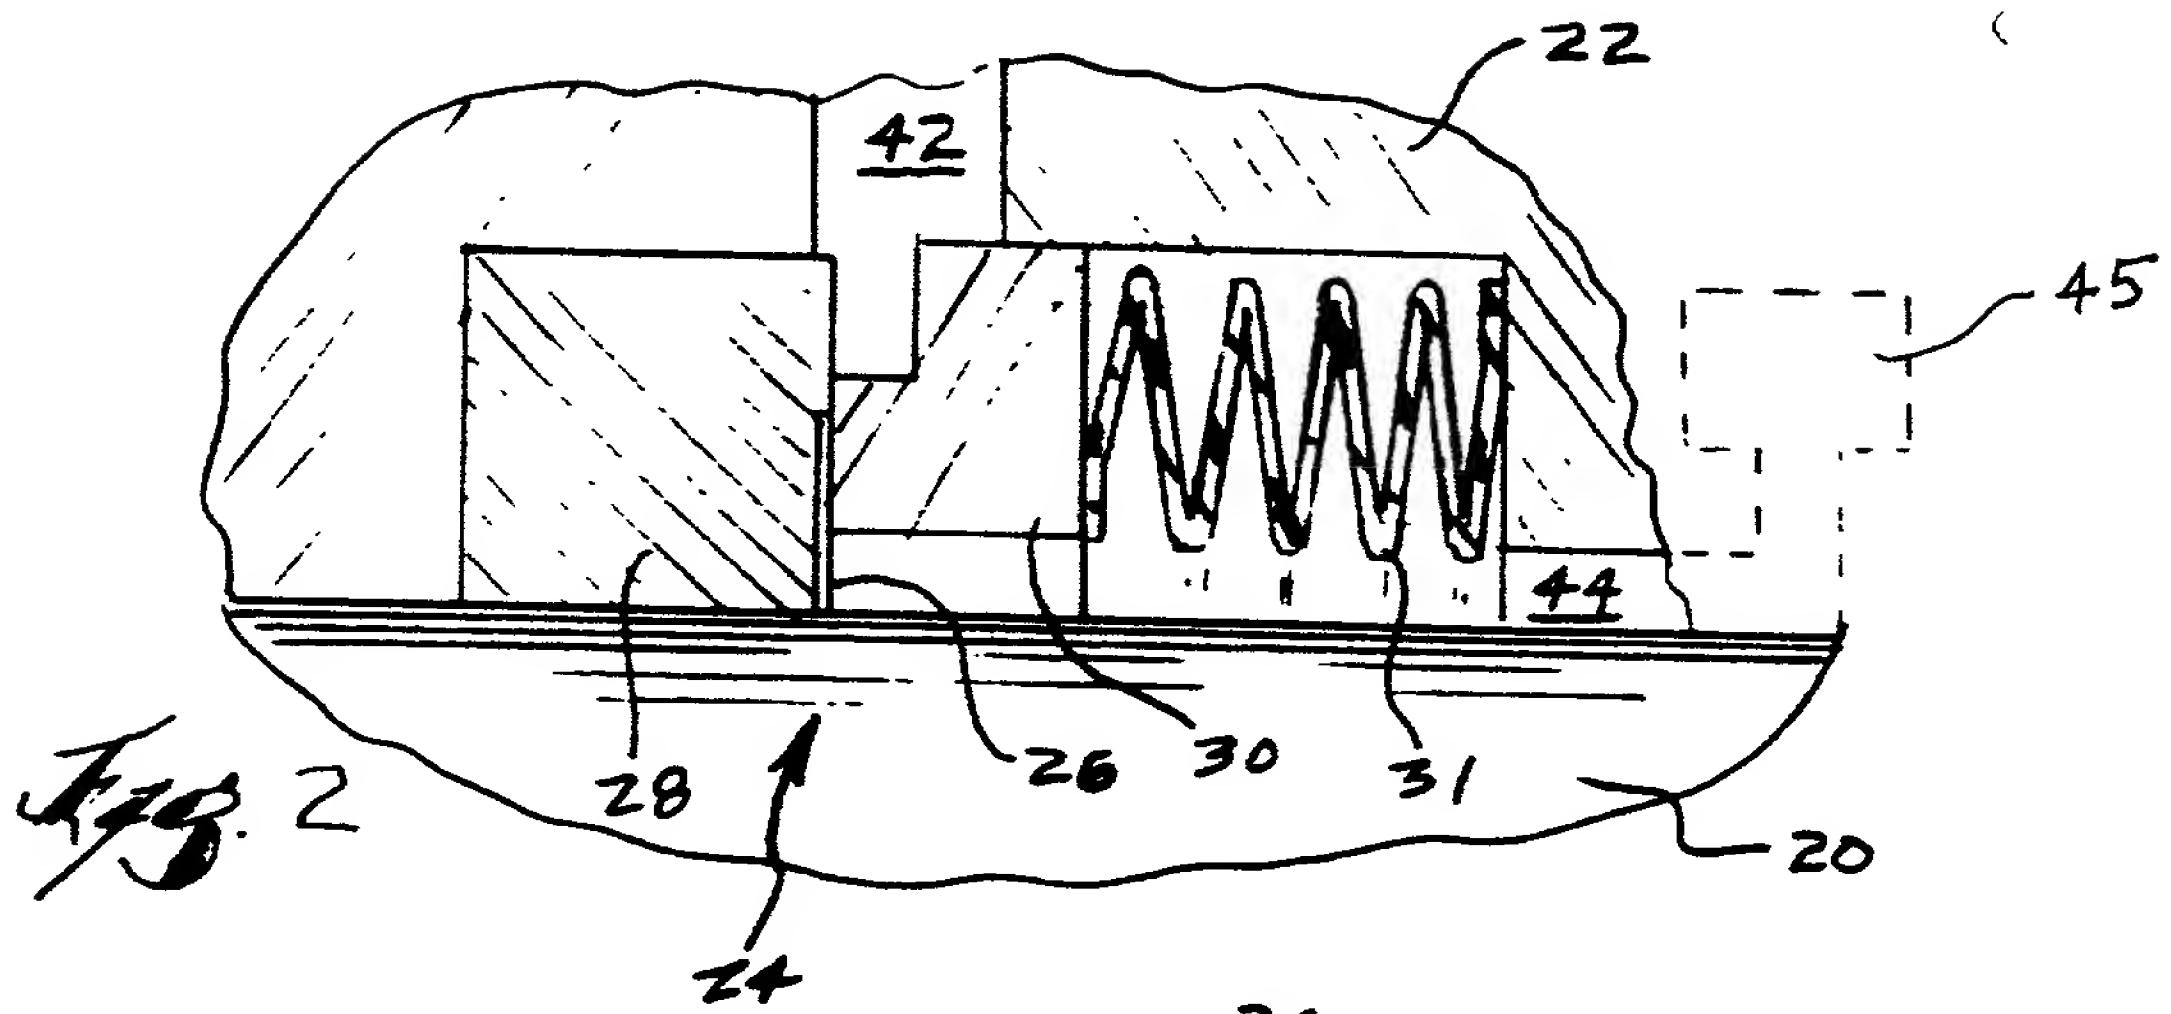

2025 RELEASE UNDER E.O. 14176

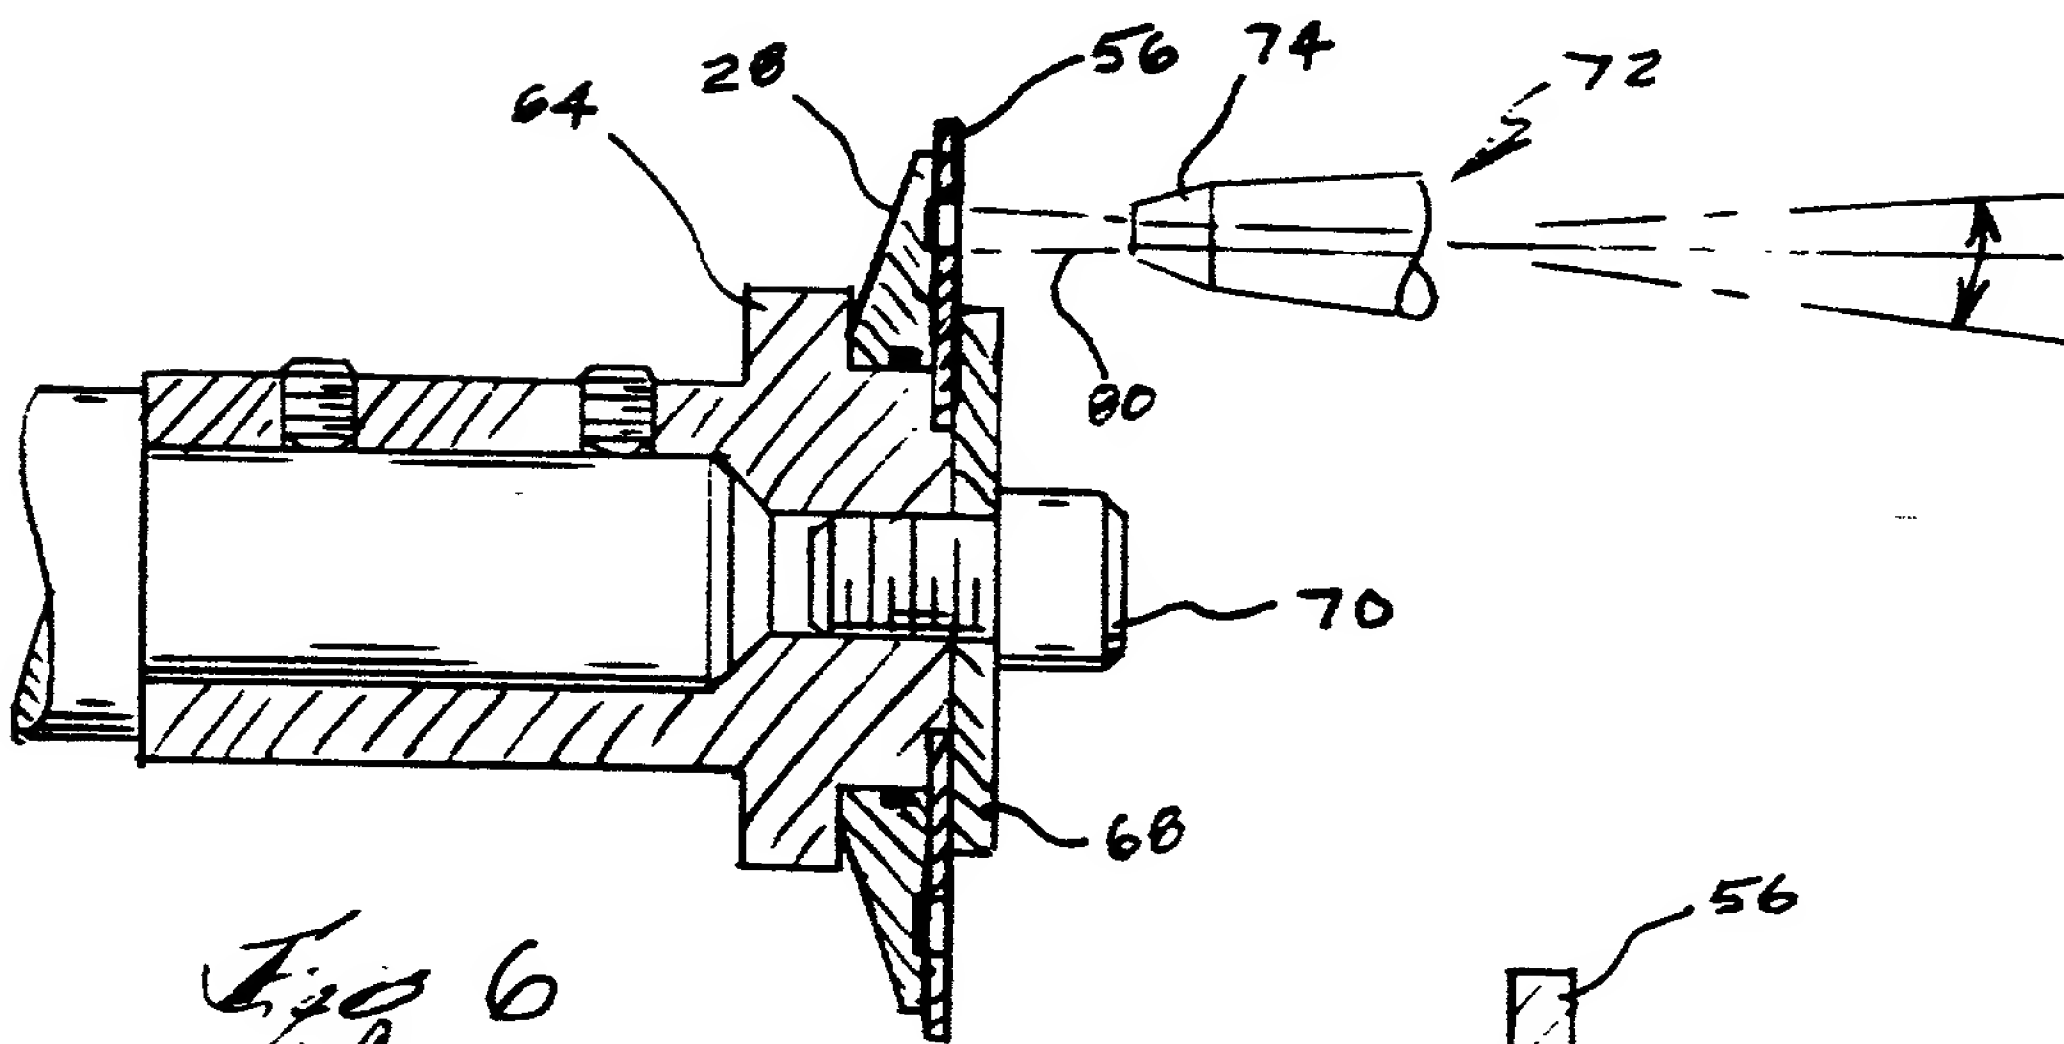
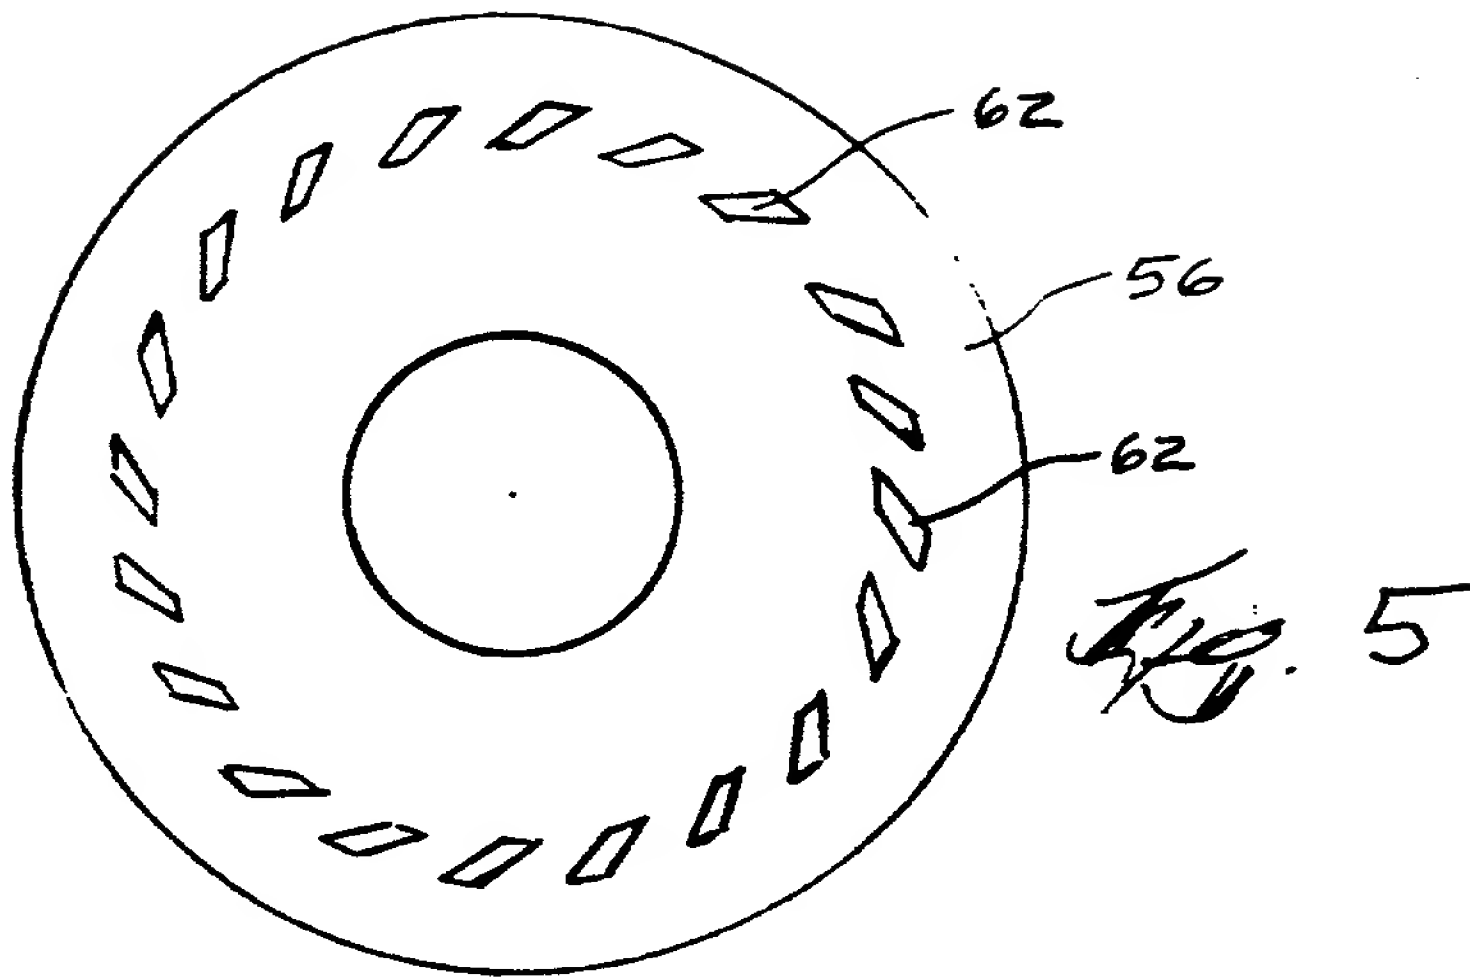


Fig. 6

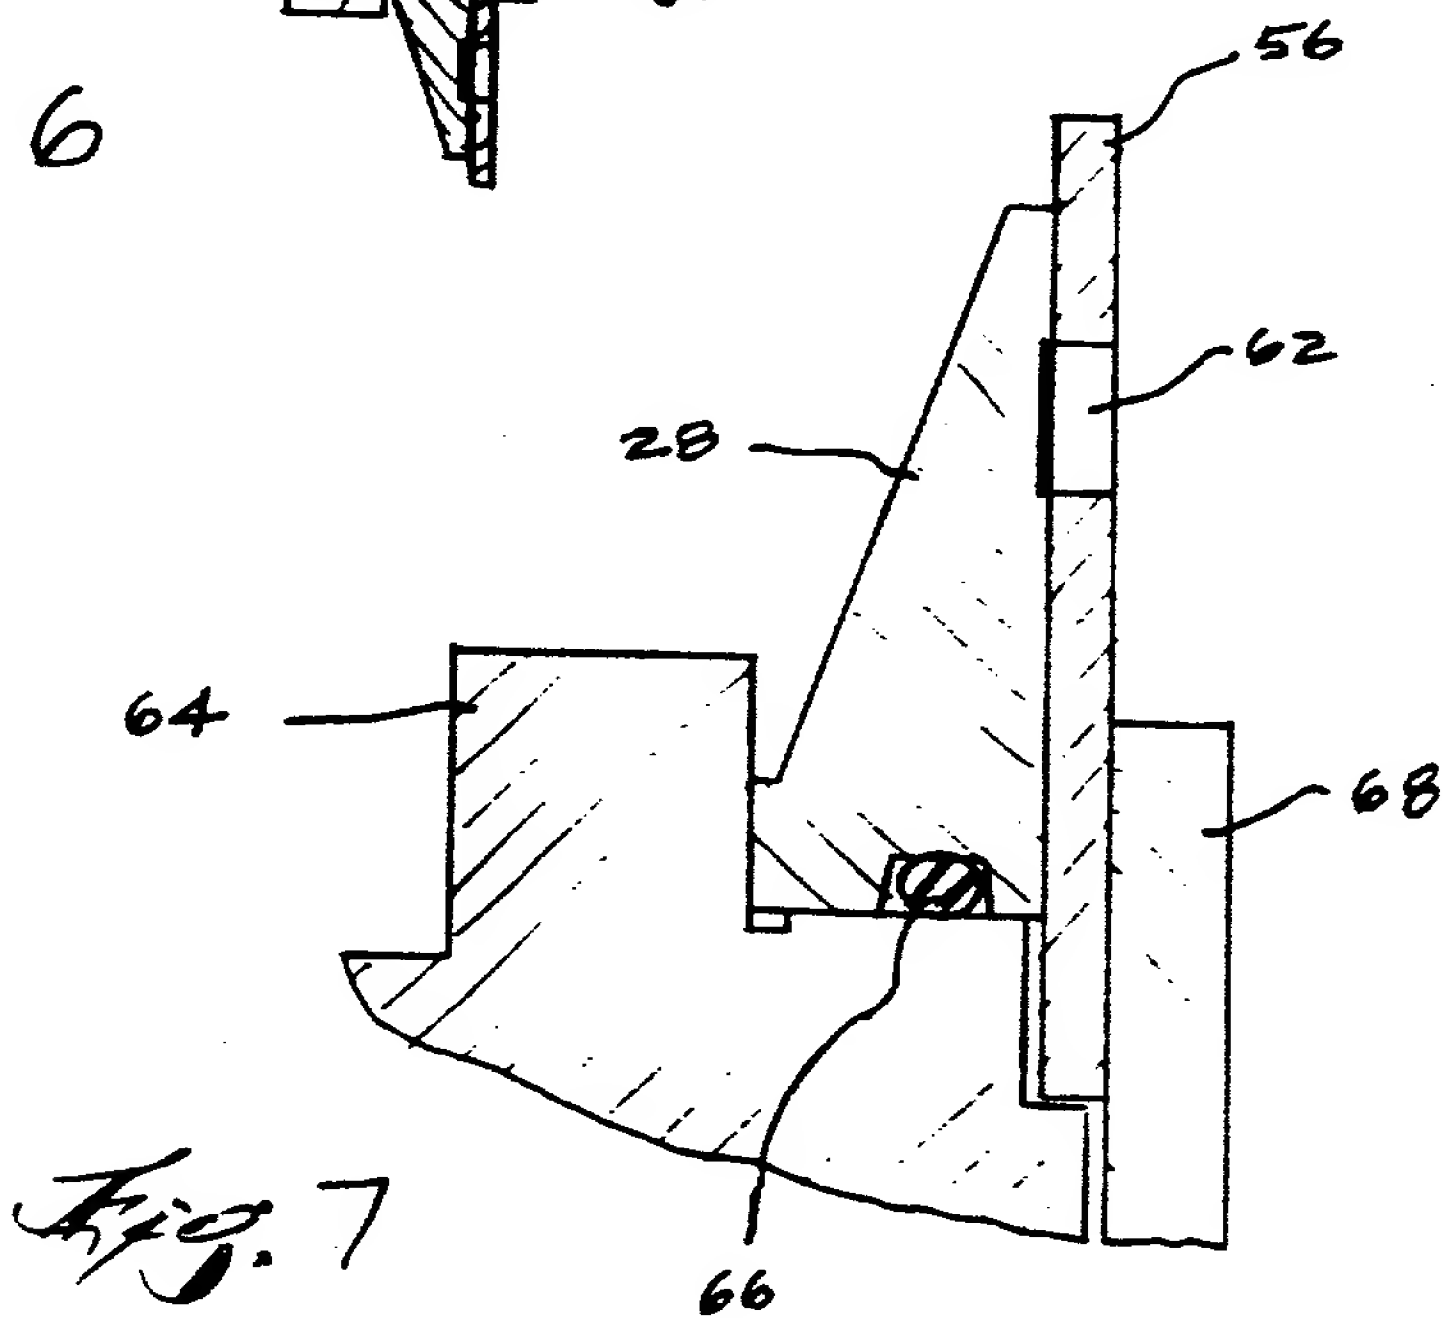


Fig. 7